


Powered by I.M.M. Hydraulics

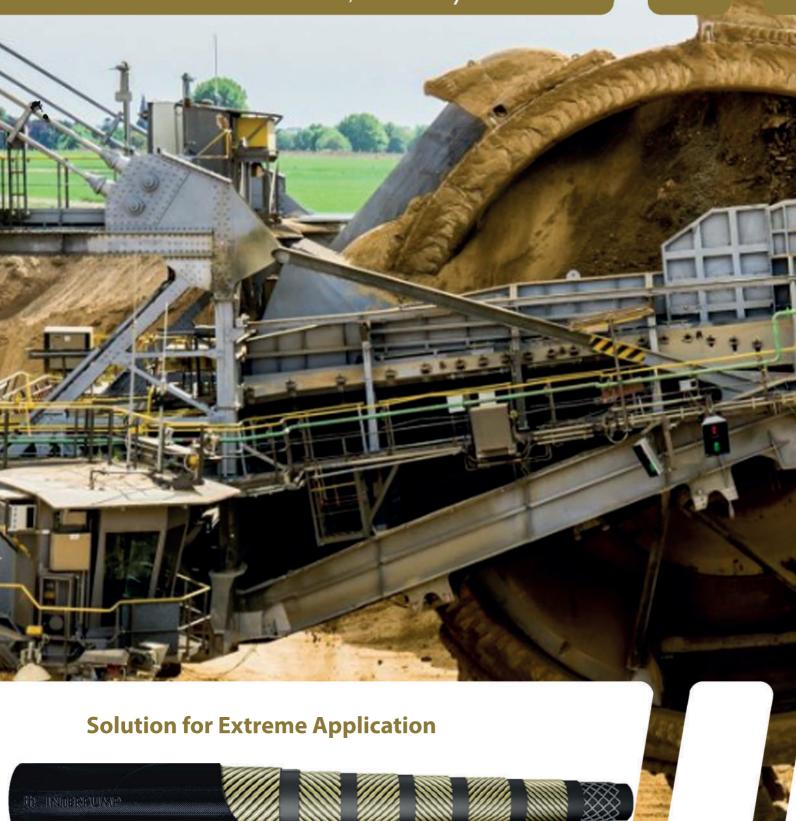

**MEGADRILL** 

Powered by I.M.M. Hydraulics

**Six Spiral Hoses** with sizes of 2.1/2" and 3" for Drilling Application.

The **MEGADRILL** line has been redesigned, the new hoses are more compact and are now available with the IMM crimping solution.

The MegaDrill family is released for:

Quasi-static applications at the WP of 350bar (5000psi) with s.f. of 4 for the 2.1/2" and sf. 2,5 for the 3"

Dynamic applications at:

WP of 350 bar for the 2.1/2" WP of 210 bar for the 3"

## INTERPUMP MEGADRILL

	$\Theta$				<b>@</b>		<b>@</b>				<u>√</u> Kg		Land
Part number	ID		Cina	OD	Max WP		Min BP		Min BR		Weight		
	in	mm	Size	mm	bar	psi	bar	psi	mm	inch	kg/m	lb/ft	Ferrule
THEMMDRN40	2.1/2"	63.5	40	84.5	350	5075	1400	20300	900	35.430	8.173	5.492	0013-40
THEMMDRN48	3"	76.2	48	97.3	350 (*)	5075	880	12760	1000	39.370	9.515	6.393	0013-48
THEMMDRN48	3"	76.2	48	97.3	210 (**)	3045	880	12760	1000	39.370	9.515	6.393	0013-48

The **MEGADRILL** hoses are now available with own crimping solution:

- Ferrules: 0013-40 & 0013-48

- Interlock insert: 0370H40-40 & 0370H48-48

- Flanges: 1300H40-40 & 1300H48-48

